


Phoenix DIRECT, an automated industrial cable recycling machine built with the substantial capacity to process ~3000 lb/per hour of ICW (variable due to composition and yield) or ~160,000 lb/mo of mixed ICW with a one-shift operation; estimate includes maintenance downtime for blade changing and lubrication. The equipment is delivered ready to work with minimal on-site assembly. Training and installation supervision is included and provided on-site by a Copper Recovery factory trained technician. Cables should be pre-sorted for maximum output. Gaylord quantities of large plastic cable spools, coils and bundles can be fed directly into the shredder without any need for precutting. The Wagner WS22 Shredder discharge auger feeds directly onto the in-feed belt conveyor which includes an over-belt magnetic separator. This modular system design allows for increased capacity with our plug and play "Plus Upgrade" and "FRM1000" modules anytime in the future. Trust in our experience and know-how for your transformation from a recycler to a processor.







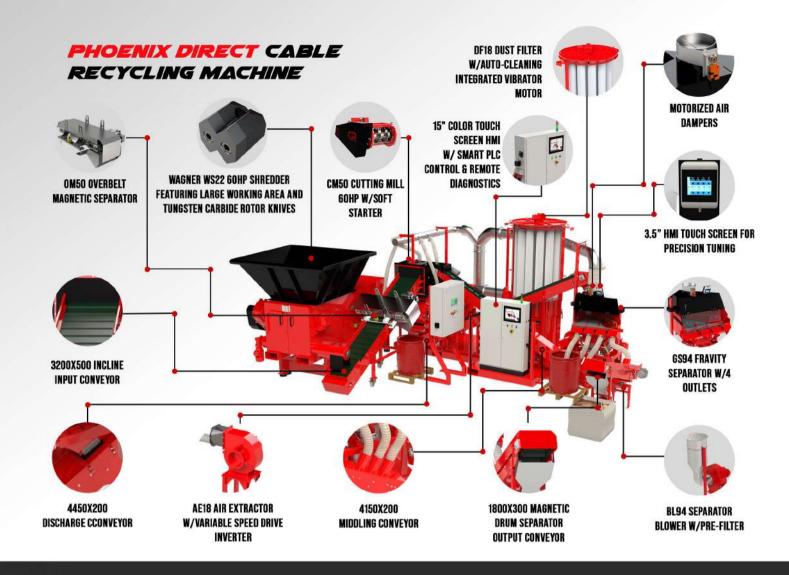

Advanced, automated HMI touch-screen PLC operation with 1-touch start/stop



MAX capacity 420,000 lb or 190,500 kg/mo with high yield ICW (Insulated Copper Wire)



Can process steel or aluminum armored BX/MC Cables and clean AL/Cu radiators



Includes items 1,2,4-10,15,17 (Everything seen in the above image)

MODELS	MAX THROUGHPUT	FLOOR SPACE REQUIREMENT	PLANT HP	KW	480V AMPS
Phoenix	2000 lb or 900 kg/hr	344 sqft or 32 m2	76	57	125
Phoenix XD	3500 lb or 1580 kg/hr	842-1344 sqft or 78-125 m2	140	105	270
Phoenix XD Plus	4000 lb or 1800 kg/hr	1014-1682 sqft or 95-157 m2	200	150	370



